




sterinox
Our Quality, Our Power

**EXPERTS IN
PROCESS DESIGN AND
EQUIPMENT MANUFACTURING
FOR WATER AND VESSELS**



The core values of our organisation are positive attitude, innovation, ethics, openness, quality management & teamwork.

ABOUT US

Sterinox Systems is an innovative & quality-driven company. Since its inception, Sterinox Systems has always strived for the highest quality standards and customer satisfaction through innovation, optimization, good infrastructure, and skilled manpower. Our expertise is in manufacturing for Pharmaceutical, Biotechnology, Cosmetics, Food & Beverages, Semiconductor, and Dairy industries.

VISION

Evolve as a global manufacturer through innovation, skilled workforce, quality management and professional approach.

MISSION

Explore new opportunities and optimize design & engineering processes by standardization and strictly adhering to the quality and safety standards. Also to offer solutions to new challenges in the respective areas of application.

OUR CLIENTS



QUALITY

Sterinox Systems strictly adhere to cGMP guidelines and our products comply with ASME (BPE), ASME Section VIII Div 1, FDA, EP, BP, IP, and USP design standards. Our philosophy of continuous improvement and professional performance helps us in achieving new peaks in quality and safety standards. We are in process of ISO 9001:2008 certification. QAP (Quality Assurance Plan) and internal test reports are always submitted to customers prior to dispatch.

INFRASTRUCTURE

Sterinox Systems office is in Mumbai. It is a design & engineering center. A team of certified engineers and draughtsmen carry out design & engineering activities with a completely professional approach.


Sterinox Systems factory is located in the Thane district (Near Mumbai). Our factory set up in the span of 6000 Sqft. area with well-equipped machinery backed by a dedicated team of well-qualified engineers, draughtsmen, and skilled workers.

We have a separate team of site engineers responsible for providing support on-site.

OUR PRESENCE



MULTI COLUMN DISTILLATION PLANT (WFI PLANT)

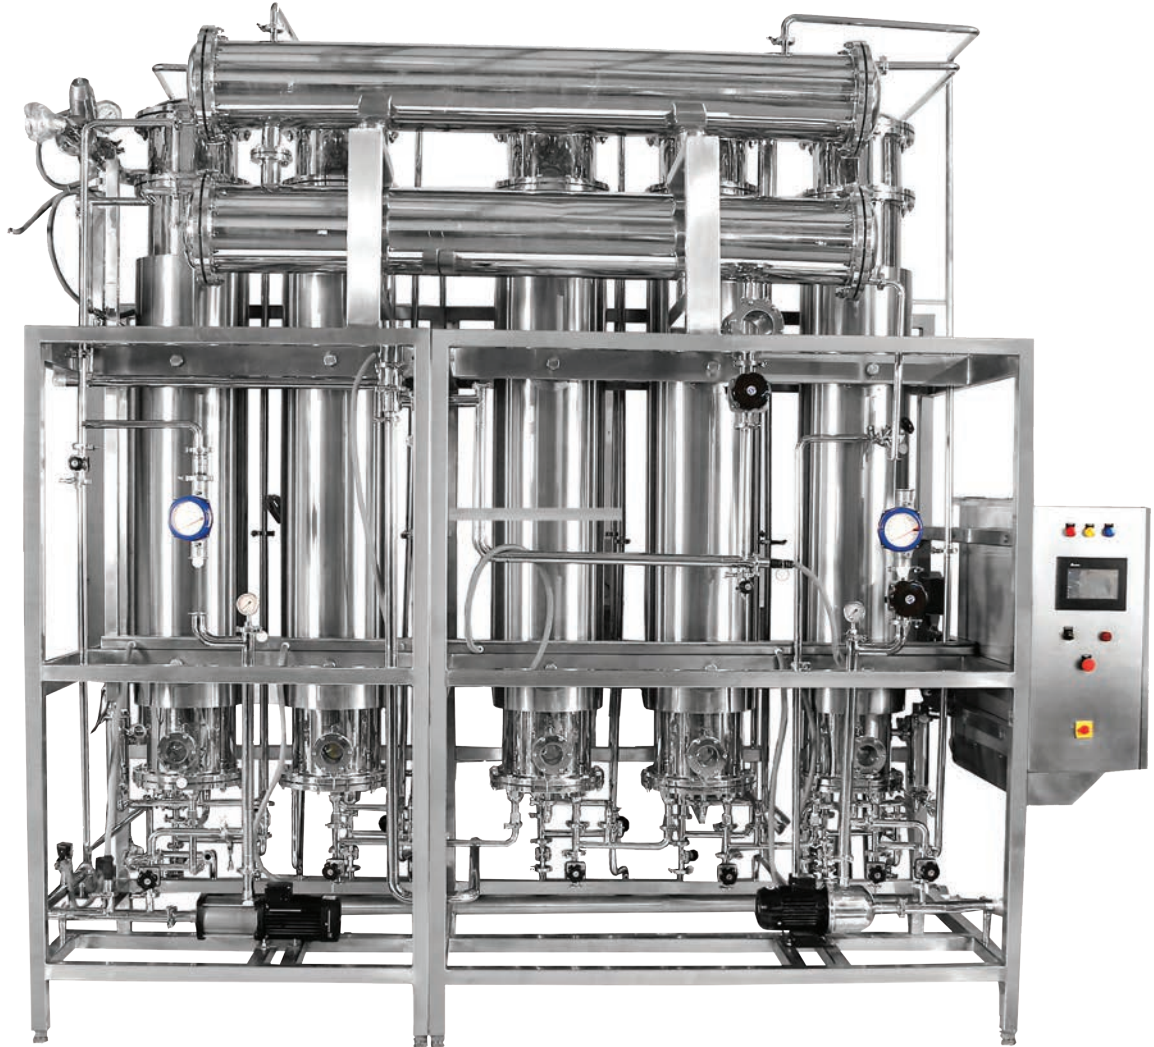

APPLICATIONS

Multi Column Distillation Plant produces WFI (Water For Injection)
WFI is required for

- LVP / SVP Manufacturing
- Vaccines Manufacturing
- Ophthalmic Products
- Nasal Products
- Insulin Manufacturing
- Any Kind of Liquid or Dry Sterile Products

The Multi Column Distillation plant produces low conductivity pyrogen / endotoxin free Water For Injection (WFI) by stage distillation process. As the name suggests the unit consists of a series of pressure vessels in the form of columns / stills which are inter connected. Boiler steam is utilised only in the first column to produce pure steam and remaining columns utilize this pure steam to produce furthermore pure steam. During this heat exchange process, pure steam condenses. Additional condensers are provided on top to condense the pure steam completely to produce WFI. The plant is designed for maximum heat recovery and hence very economical in operating cost.

FEATURES

- Capacity varies from 5 to 6,000 litres per hour
- Designed and manufactured as per ASME BPE and cGMP guidelines
- The WFI generated meets USP, EP, BP and IP standards
- Phase separation is based on falling film evaporator technology
- Specially designed and constructed to remove pyrogen / endotoxin
- All heat exchange tubes will be seamless quality
- Designed and constructed to achieve 100 % drainability
- All wetted parts are made from AISI 316L stainless steel and rest are made of AISI 304 stainless steel
- All water contact surfaces are finished to electro polished to $Ra < 0.4$ and are crevice free
- IPC & PLC based 21 CFR part 11 complied fully automatic control panel with online printing facility
- Double tube sheet construction for the first column, where boiler steam is present
- Our compact and optimised design required minimum human interference. This means low maintenance and low operational cost
- Complete set of documentation and certificates to ensure compliance with regulatory authority. We provide DQ, OQ, IQ, FAT & SAT. Also assist client to develop PQ



PURE STEAM GENERATOR



APPLICATIONS

Pure Steam Generator (PSG) produces Pure Steam. Pure Steam is required for

- In Situ Sterilization of any equipment
- Autoclave Sterilization

The pure steam produced by PSG is used for sterilisation in storage tanks fermenters, reactors, pipelines & autoclaves.


It is also used for humidification of sterile area and can be used wherever sterilization is required.

FEATURES

- Capacity varies from 5 to 3,000 Kg per hour
- Designed to produce pure steam @ 3 kg/cm² pressure
- Designed and manufactured as per ASME BPE and cGMP guidelines
- The Pure Steam generated meets EN 285, USP, EP, BP and IP standards
- All heat exchange tubes will be seamless quality
- Phase separation is based on falling film evaporator technology
- Specially designed and constructed to remove pyrogen / endotoxin
- Designed and constructed to achieve 100 % drainability
- The unit and all its components are mounted on AISI 304 stainless steel skid
- All wetted parts are made from AISI 316L stainless steel and rest are made of AISI 304 stainless steel
- All contact parts are finished to electro polished to Ra < 0.4 and are crevice free
- IPC & PLC based 21 CFR part 11 complied fully automatic control panel with online printing facility
- Double tube sheet construction for the first column, where boiler steam is present
- Our compact and optimised design required minimum human interference. This means low maintenance and low operational cost
- Complete set of documentation and certificates to ensure compliance with regulatory authority. We provide DQ, OQ, IQ, FAT & SAT. Also assist client to develop PQ



PURIFIED WATER TREATMENT PLANT

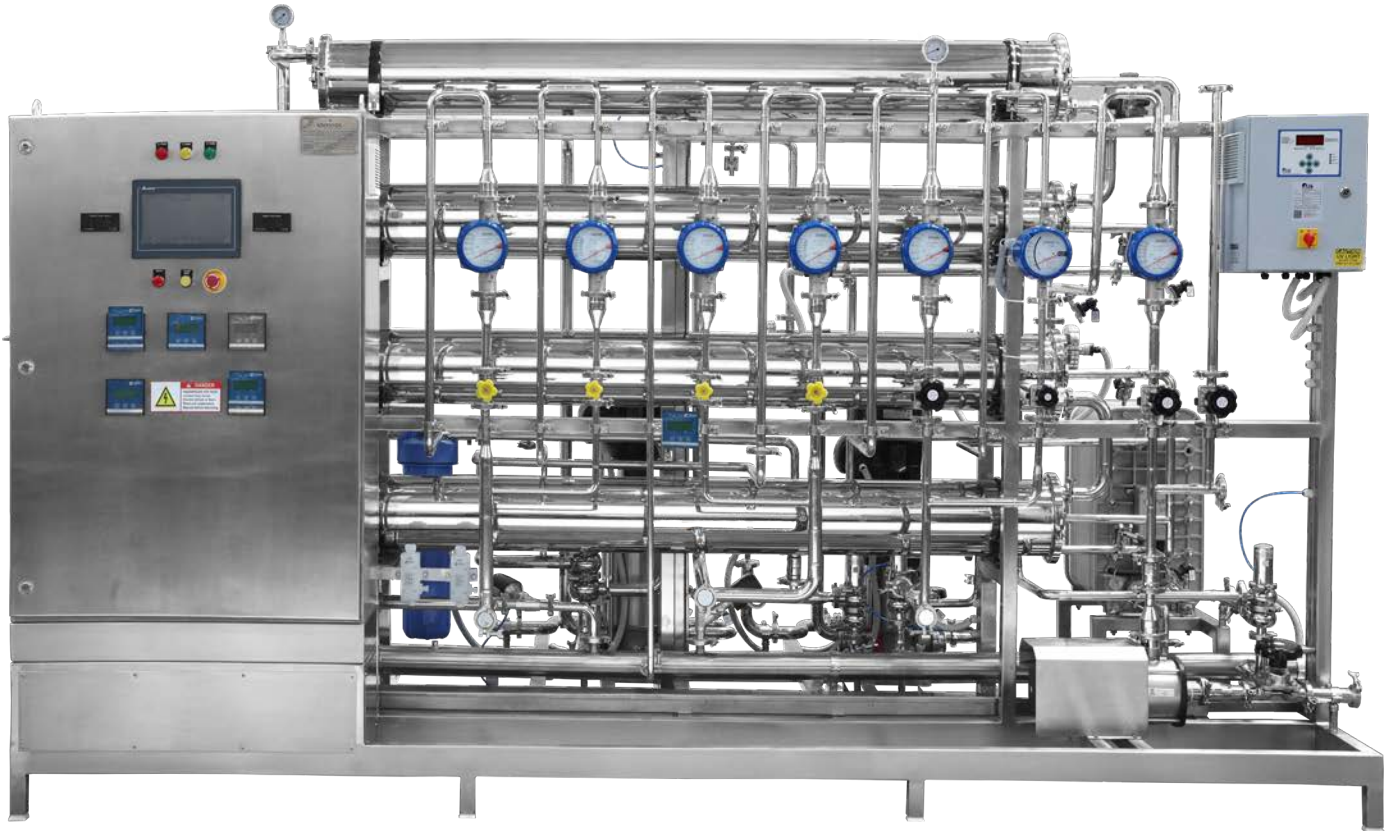

APPLICATIONS

PW Plant produces Ultra Purified Water required to produce any kind of Pharma products. Purified Water is required for

- Tablet / Capsule Manufacturing
- Liquid Orals Products
- To Produce Pure Steam
- Cosmetic Products
- To Produce WFI
- Ointment / Cream / Gel / Paste / Lotion Manufacturing

Purified Water (PW) Treatment Plants (RO-EDI Plants) generates High Purity water for pharmaceutical, Biotech, Semiconductor and Food & Beverages Industry. Sterinox Purified Water Treatment plants are designed and optimised for hassle free low maintenance operation.

The entire system utilizes best instruments and equipments ensuring solid performance and reliability. Sterinox Purified Water Treatment Plants are skid based and designed to accommodate minimum footprint.

FEATURES

- The final output quality complies with USFDA, MHRA, WHO, EU & other international pharmacopeia's and standards
- Plants are manufactured as per cGMP guidelines and complies with ASME BPE Standard
- IPC & PLC based fully automated plant complies with 21 CFR Part 11 & GAMP 5. Hence low maintenance and minimum human interference required
- Designed for minimum dead leg criterion of < 1.5 D. Also 100% drainability can be achieved by maintaining the minimum slope of 1:100
- Complete inter connecting piping is semi seamless tubes as per ASTM A270
- All contact parts are AISI 316L Stainless Steel and Non-Contact parts are AISI 304 Stainless Steel
- All contact parts surface is electro polished to less than 0.4 Ra finish.
- All interconnecting piping are orbital welded using High Purity (99.99%) argon gas and welding joints can be inspected by boroscopy machine
- Complete set of documentation and certificates to ensure compliance with regulatory authority. We provide DQ, OQ, IQ, FAT & SAT. Also assist client to develop PQ



STORAGE & DISTRIBUTION SYSTEM FOR PW / WFI



APPLICATIONS

PW / WFI Storage & Distribution System is required for

- Purified Water / WFI Storage
- Controlling Microbial Load in WFI / PW
- Distribution of Purified Water / WFI
- Rejecting High Conductivity PW / WFI
- For Sanitization of PW Tank & Distribution Loop
- Sterilization Process Management WFI Tank & Distribution Loop

Storage & Distribution System is required to store and distribute the PW / WFI within the plant. The system ensures stringent quality parameters of Pharmaceutical / Biotech industry. The distribution system is a closed loop system. Closed loop system ensures integrity of the PW & WFI. The entire Storage & Distribution System parameters are monitored & controlled with the help of instruments & equipments mounted on Distribution Skid.

FEATURES

- PW and WFI Storage Tanks are manufactured as per cGMP guidelines and ASME VIII, DIV 1 standard
- Storage tanks can be plain, jacketed or limpet type. Jacketed and limpet tanks are provided suitable rockwool / glasswool insulation and AISI 304 stainless steel cladding
- If required, provision of electric heating can also be provided with suitable insulation & cladding
- Process nozzles will be flushed sanitary flange type
- To make sure optimum cleanability, all tanks are Riboflavin tested
- PW / WFI tanks are provided with necessary accessories for reliable operation
- IPC & PLC based fully automated plant complies with 21 CFR Part 11 & GAMP 5
- Fully drainable sanitary pumps are selected to maintain minimum velocity of 1.2 m/s in the return line at peak load consumption
- Two pumps (Duty / Stand by) are provided to ensure continuous hassle-free operation along with swing arm assembly for changeover
- Distribution skid is provided with instruments to monitor parameters like temperature, conductivity, pressure, flow rate, velocity and also TOC count
- Distribution piping is designed for minimum dead leg criterion of < 1.5 D
- Distribution Loop tubes are semi seamless tubes as per ASTM A270
- All contact parts MOC is AISI 316L Stainless Steel and electro polished to less than 0.4 Ra surface finish and Non-Contact parts are AISI 304 Stainless Steel
- The Distribution loop is designed for 100% drainability by maintaining the minimum slope of 1:100
- All weld joints in the loop are orbital welded using high purity (99.99%) argon gas and can be inspected by boroscopy machine
- Complete set of documentation and certificates to ensure compliance with regulatory authority. We provide DQ, OQ, IQ, FAT & SAT. Also assist client to develop PQ

LIQUID ORAL MANUFACTURING PLANT

The Liquid Oral Manufacturing Plant is also known as Syrup Manufacturing Plant. The sugar and water are loaded to the Sugar Syrup Vessel either manually or with the vacuum system. Here sugar syrup is prepared using stirrer & electrical / steam heating at required temperature. If required activated carbon can be used to make sugar syrup crystal clear. Sugar syrup is transferred to manufacturing Vessel by vacuum or by pump through basket filter. After processing in manufacturing vessel the product can be homogenised with the use of homogeniser. Homogeniser has inbuilt pumping facility which can provide desired multiple passes in recirculation mode. Finally the transfer pump discharges the final product to the storage vessel through zero hold up filter press.

THE PLANT CONSISTS OF

Sugar melting vessel	Inline homogenizer
Manufacturing vessel	Top / bottom entry stirrer
Storage vessel	Inter connecting piping
Online sugar syrup pre filter	Transfer pumps
Vacuum system for transfer of sugar & sugar syrup	Working platform
Zero holdup filtration unit	PLC based control panel

FEATURES

- Available in various batch capacities from 50 litres to 20,000 litres
- Complete plant is designed & manufactured as per cGMP & ASME BPE guidelines
- All vessels are vacuum rated and hence can be sterilized
- Bottom entry stirrer can be provided to restrict overall height
- All Tanks are provided with necessary accessories for reliable performance
- Pre-mix Vessel can be provided if process demands
- IPC & PLC based 21 CFR part 11 complied fully automatic control panel with online printing facility
- Working platform and ladder with railing in AISI 304 stainless steel
- All connecting pipelines, fittings, valves and contact parts are of AISI 316 stainless steel and are electro-polished and crevice free
- Sugar Melting Vessel and Manufacturing Vessel can be provided with jacket or limpet coil for steam heating. If required, provision of electric heating can also be provided. All Vessels are provided suitable rockwool / glasswool insulation and AISI 304 stainless steel cladding
- Loadcell is provided for volumetric measurement
- Spray ball is provided in all vessels for online CIP
- Complete set of documentation and certificates to ensure compliance with regulatory authority. We provide DQ, OQ, IQ, FAT & SAT. Also assist client to develop PQ



STERILE VESSELS

Sterile vessels are required to manufacture liquid injectable products. We adhere to stringent manufacturing processes and follow cGMP / ASME BPE guidelines to manufacture the Sterile Vessels. Manufacturing and Holding Vessels are accompanied with suitable high grade filtration to get the final product. The Vessels are designed to achieve online CIP & SIP. Sterile vessels are provided with necessary accessories, high grade instruments and PLC based control panel to monitor and control the process of manufacturing to utmost integrity.

FEATURES

- Zero dead leg aseptic design of bottom outlet valve
- Zero dead leg aseptic design of sampling valve
- Calibrated full view glass for the blending vessel
- Volume monitoring by load cells
- Process Automation
- IPC & PLC based 21 CFR part 11 complied fully automatic control panel with online printing facility
- Aseptic connection and flanges to avoid product contamination
- Inbuilt CIP-SIP System or Separate CIP-SIP System can be provided
- Agitator : Bottom driven agitator (Electrical & Magnetic)
- Functionally : Cleaning in place, Sterilization in place, Fermentation process with temperature control, pH control, DO control
- Jacket with Pressure gauge, Safety Valve, Vent, Chilled water supply & return, Drain, Circulation pump with heat exchangers for fine temperature control

APPLICATIONS

Sterile Vessels are required for

- LVP Manufacturing
- SVP Manufacturing
- Manufacturing Nasal & Ophthalmic Products
- Manufacturing Vaccines & Serums
- Manufacturing specialized Products likes Blood Plasma / Protein Refolding / Crystallizer etc.
- Manufacturing of any Kind of Liquid Sterile Products



CIP (Clean in Place) System & SIP (Sterilization in Place) System

CIP system is required to clean the equipments in place. The CIP process is generally customised as per the client requirements. CIP system has wide ranging applications. The system can be built with storage tanks and also tankless system can be provided to suit the client requirements.


SIP system are required to sterilise plants and equipments in place. The SIP process are designed to ensure maintenance of sterilisation temperature and pressure during the entire sterilisation cycle.

If required combo plant for CIP & SIP can be built. Both systems has wide ranging applications like in Pharma & Biotech industry, Dairy, Food & Beverage industry.

FEATURES

- CIP / SIP System is provided with instruments to monitor parameters like temperature, conductivity, pH and TOC
- The system is designed and constructed to comply with ASME BPE & cGMP.
- CIP / SIP systems are integrated with high grade instrumentation and PLC based automation to control and monitor the operations with highest level of integrity yet user interface remains simple and easy to understand. If required SCADA system can also be incorporated.
- Various options can be provided to achieve sanitisation temperature, like jacketed tank, tank with electric heaters and Double Tube Sheet type Heat exchangers can be provided
- CIP system are designed to make sure it passes riboflavin test
- Inter connecting piping is designed for minimum dead leg criterion of $< 1.5 D$
- Fully drainable design by proper arrangement of equipments and by maintaining the minimum slope of 1:100 for inter connecting piping
- All piping weld joints are orbital welded using High Purity (99.99%) Argon Gas and can be inspected by boroscopy machine.
- GAMP 5 sentence
- Complete set of documentation and certificates to ensure compliance with regulatory authority



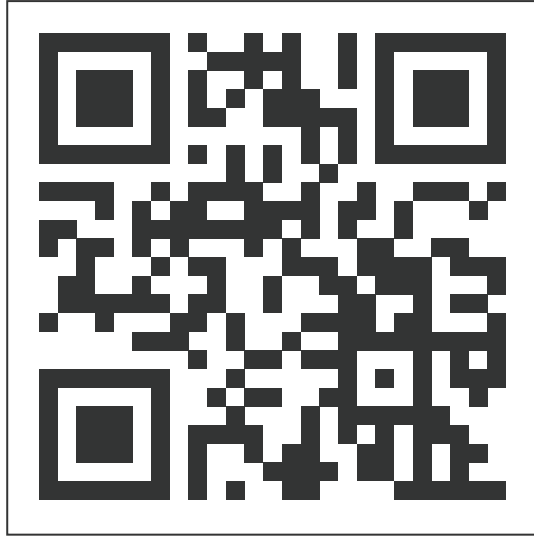

Corporate Office

A - 307, V Star Plaza, Chandavarkar Road,
Borivali West, Mumbai, Maharashtra 400092
India

Factory

Panjar Talav Road, Wakipada,
Naigaon (East), Maharashtra 401 208
India

Telephone

+91-22-28940 600 / 700

Email

inquiry@sterinoxsystems.com

Website

www.sterinoxsystems.com